

DHU500 Series - Quick Setup Guide

1. CHECK PACKAGE CONTENTS

The following components are supplied with the DHU Series Digital Video Recorder. Keep the carton and packaging materials for moving or storage of the DVR Unit.



DVR



Power Cord



Installation Manual




Remote Control



Batteries

Qty	Accessories
1	User Manual
1	IR Remote Controller
1	Power cable
2	Power battery (AAA Size)
1	DVR

2. CONNECTIONS

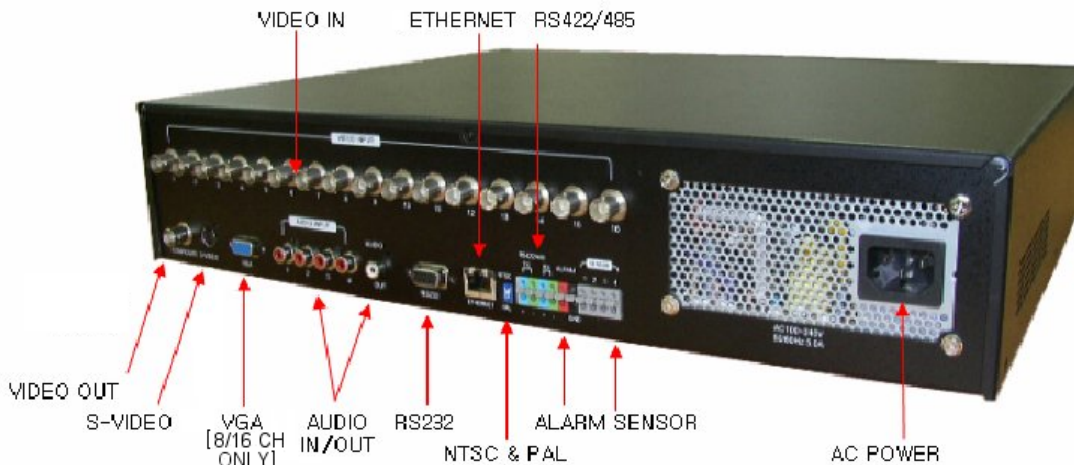

3. BASIC SETUP

Date and time

- Press the **MENU** button.
- Enter the password (default is 00000000).
- Scroll down to the **SYSTEM SET** menu and press SEL.





Note: Make sure the DVR is not currently in REC Mode.

- Select the option for **BASIC**, and press **SEL**.
- Scroll down to the **DATE/TIME** option and press **SEL**.
- Edit the **DATE /TIME** using the numeric buttons on the front panel. Modify the values using the left and right buttons to change positions.

Once you have entered the new Date and Time, press **SEL**.

- Scroll down to **SAVE &EXIT**, and Press **SEL**.

- Press **MENU** twice to exit **MENU** mode.

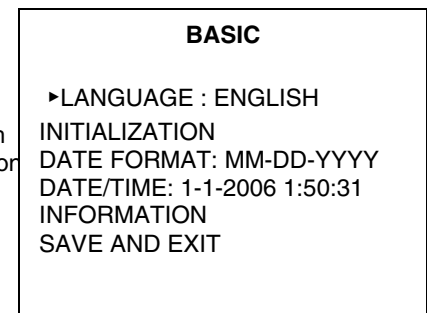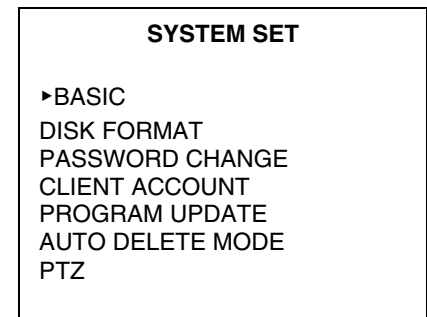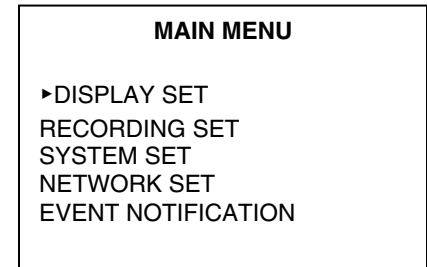

4. NETWORK SETUP

The following components (not included with this DVR) are needed for Network Connection

- Router
- Network Cable
- Internet Connection (For WAN Connection and setup of DDNS)
- PC with Windows 2000 or XP and Internet Explorer

Please refer to the Network Connectivity section of the User Manual for detailed Network Setup instructions.

DHU500 Series - Quick Setup Guide

5. CAMERA & RECORDING SETUP

BASIC RECORDING MODES :

1. NORMAL RECORDING
2. MOTION RECORDING

PROCEDURE

- Press the **MENU** button.
- Enter the password (default is 00000000).
- Scroll down to the **RECORDING SET** menu and press **SEL**. Enter the password (default is 00000000).

Note: Make sure the DVR it is not currently in REC Mode.

A. CAMERA RESOLUTION.

- Select the **GLOBAL PARAMETER** option.
- Scroll to the **RECORDING RESOLUTION** option.
- Select the **RECORDING RESOLUTION** (360 X 240 or 720 X 240).
- Select **SAVE & EXIT**.


B. RECORDING MODES

1. NORMAL RECORDING

- Select the **RECORDING SET MENU**. Enter the password.
- Select the **NORMAL RECORDING** option.
- Scroll down to the desired **CAMERA** and press **SEL**. Adjust the **FPS & QUALITY** using the UP & DOWN buttons. Use the left and right buttons to move to the next field. When finished, press the **SEL** button.
- Select **SAVE & EXIT** to exit.


2. MOTION RECORDING

- Select the **RECORDING SET MENU**. Enter the password.
- Select the **MOTION RECORDING** option.
- Scroll to the desired camera and press **SEL**. Adjust the **FPS and Quality** using the UP & DOWN buttons. Use the left and right buttons to move to the next field. When finished press **SEL**.
- Set the **POST MOTION** for the duration of the event.
- Select the **SETUP MOTION** option if you wish to adjust the Detection Area and Sensitivity of each camera (for more information, refer to the User Manual provided with your DVR unit).
- Select **SAVE and EXIT** to finish.

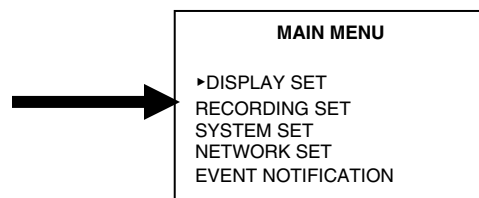


Main Menu

Recording Set Menu

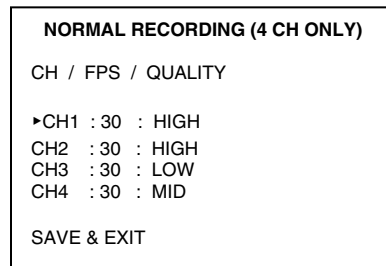

1. Normal Recording Menu

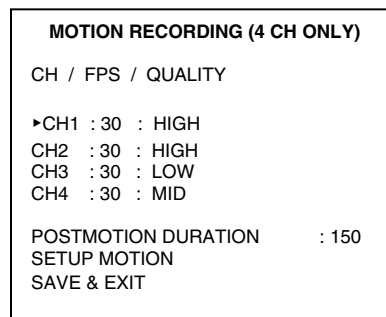

2. Motion Recording Menu

6. PLAYBACK & SEARCH

To playback video on the DHU unit you have two options – LAST EVENT and SEARCH MODE:

1. LAST EVENT: To replay the last event, press the **PLAY** button. The DVR unit will start playback at the most recently recorded event. Select a **CAMERA** number (on the front panel of the DVR) to view the camera in full screen mode. Pressing the **PLAY** button again will increase the playback speed by 2x, 4x, 8x etc. To end the Playback, press the **STOP** button

2. SEARCH MODE.

- Press the Search button. Options include:
 - DATE/TIME SEARCH
 - CALENDAR SEARCH

DATE TIME SEARCH

EVENT: Select this option to playback events for:

- **ALL** (All recorded event types).
- **ALARM** (Alarm type events only).
- **MOTION** (Motion type events only).

HDD: Select INTERNAL or EXTERNAL hard drive.

DATE: Select desired DATE/TIME. To modify the current values press **SEL**. Select the DATE & TIME using the numeric buttons of the front panel of the DVR. Use the left and right arrows to select next field. Press **SEL** to end the date selection.

PLAY: Select this option to start the PLAYBACK of the selected event.

CALENDAR SEARCH

Select this option to playback events by searching in calendar mode.

- On the **MENU** select the desired **YEAR** and **MONTH**.
- Press **SEL** to access the days on the calendar. Scroll to the desired recorded date (indicated by [] brackets) and press **SEL**.
- A second menu will be displayed, and recorded data will appear with recording indicator bars for each camera.
- Use the **LEFT** and **RIGHT** arrow keys to select the **HOUR**, and press **SEL** to access a third menu to select the **MINUTES**.
- Press **SEL** to begin playback.

